


**Model N-TNC-11(M,F) DC - 11GHz**



Precision N-TNC serial adapters are high repeatability, low VSWR and low loss devices that operate from DC to 11 GHz. They offer all combinations for adapting. They are also useful as “test port and cable savers” when used with vector network analyzers with stable electricity performance.

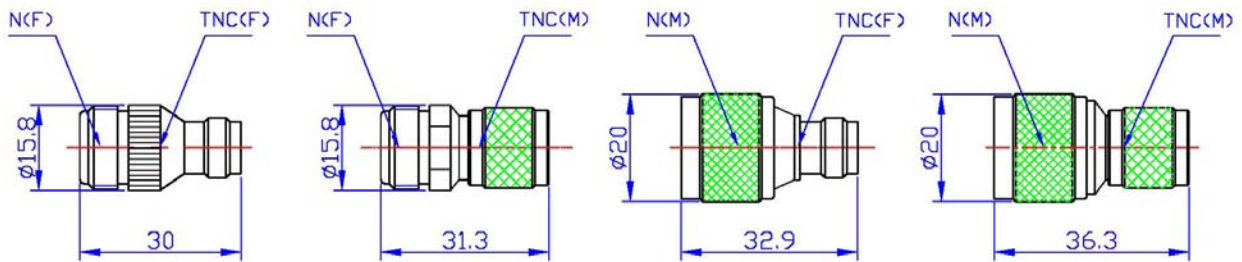

**MECHANICAL SPECIFICATIONS:**

Connectors	Male Pin	Female Pin	Dimensions(mm)	Weight
Brass Nickel Plated	Brass Gold Plated	Beryllium Copper Gold Plated	Φ15.8×30 Φ15.8×31.3 Φ20×32.9 Φ20×36.3	30~40g

**RoHS Compliant: Yes**

**ELECTRICAL SPECIFICATIONS:**

Model Number	Frequency Range (GHz)	Max VSWR	Insertion Loss(dB)
N(F)-TNC(F)-11	DC-11	1.30	0.3
N(F)-TNC(M)-11	DC-11	1.30	0.3
N(M)-TNC(F)-11	DC-11	1.30	0.3
N(M)-TNC(M)-11	DC-11	1.30	0.3

**NOMINAL IMPEDANCE:** 50Ω

**Temp Range:** -55° C ~ +125° C

**Notes:**

1. Dimensions Tolerance ±2%
2. Custom designs available for other special accuracy.