


Model APC7-N/SMA(M,F) DC-18GHz



Precision APC7-N/SMA serial adapters are high repeatability, low VSWR and low loss devices that operate from DC to 11 or 18 GHz. They offer all combinations for adapting. They are also useful as “test port and cable savers” when used with vector network analyzers with stable electricity performance.

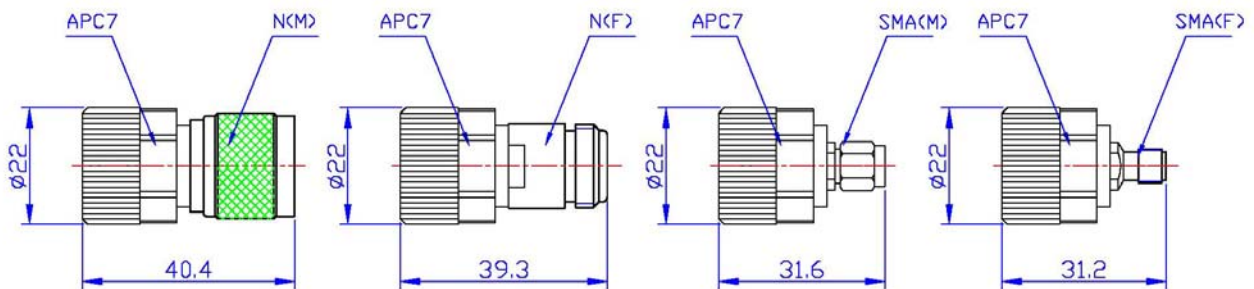

MECHANICAL SPECIFICATIONS:

Connectors	Male Pin	Female Pin	Dimensions(mm)	Weight
Brass Nickel Plated	Brass Gold Plated	Beryllium Copper Gold Plated	Φ22×40.4 Φ22×39.3 Φ22×31.6 Φ22×31.2	40~70g

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS:

Model Number	Frequency Range (GHz)	Max VSWR		Insertion Loss(dB)
		Accurate	Normal	
APC7 - N(M)	DC-18	1.15	1.20	0.3
APC7 - N(F)	DC-18	1.15	1.20	0.3
APC7 - SMA(M)	DC-18	1.15	1.20	0.3
APC7 - SMA(F)	DC-18	1.15	1.20	0.3

NOMINAL IMPEDANCE: 50Ω

Temp Range: -55° C ~ +125° C

Notes:

1. Dimensions Tolerance ±2%
2. Custom designs available for other special accuracy.